

2 -

25.50



(23°C : 20
: 1 - 1.5)

() ()



(4) : 25 .
 2,5 - 3,5
 : 1,5 - 2,2
 : 100 - 120 / 2



(4): 30 .
 100 - 150
 : 0,23 - 0,28
 : 100 - 120 / 2

+15

2 - 26.50.


15.82.

- DIN 4102 B1 ()
 - DIN EN 71-3 ()
 - DIN 68861 T1 B, C(.)
 - DIN 68861 T4 ()
 - DIN 53160 ()
 - DIN 51130 (R9
3% -)

() DINP ()

200 / 30 / 10 / 2,5

622 611 04
622 610 08
622 627 05
622 612 00

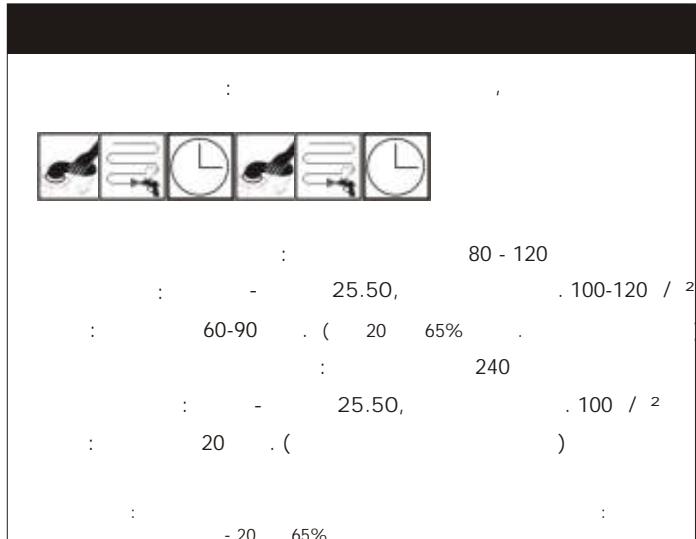

28-33 . (4)
8

12
V 15 (5 - 10%)
11.4
10 : 1

